


特性
Features

1. 125A ;
2. ;


ASW125M线圈参数 ASW125M Coil Parameter

12V	20% -80% Us	20% -80% Us	2A	15 30W
24V	20% -80% Us	20% -80% Us	1A	15 30W
36V	20% -80% Us	20% -80% Us	0.75A	15 30W
48V	20% -80% Us	20% -80% Us	0.7A	15 30W
60V	20% -80% Us	20% -80% Us	0.5A	15 30W
72V	20% -80% Us	20% -80% Us	0.4A	15 30W

型号说明 Model Coding



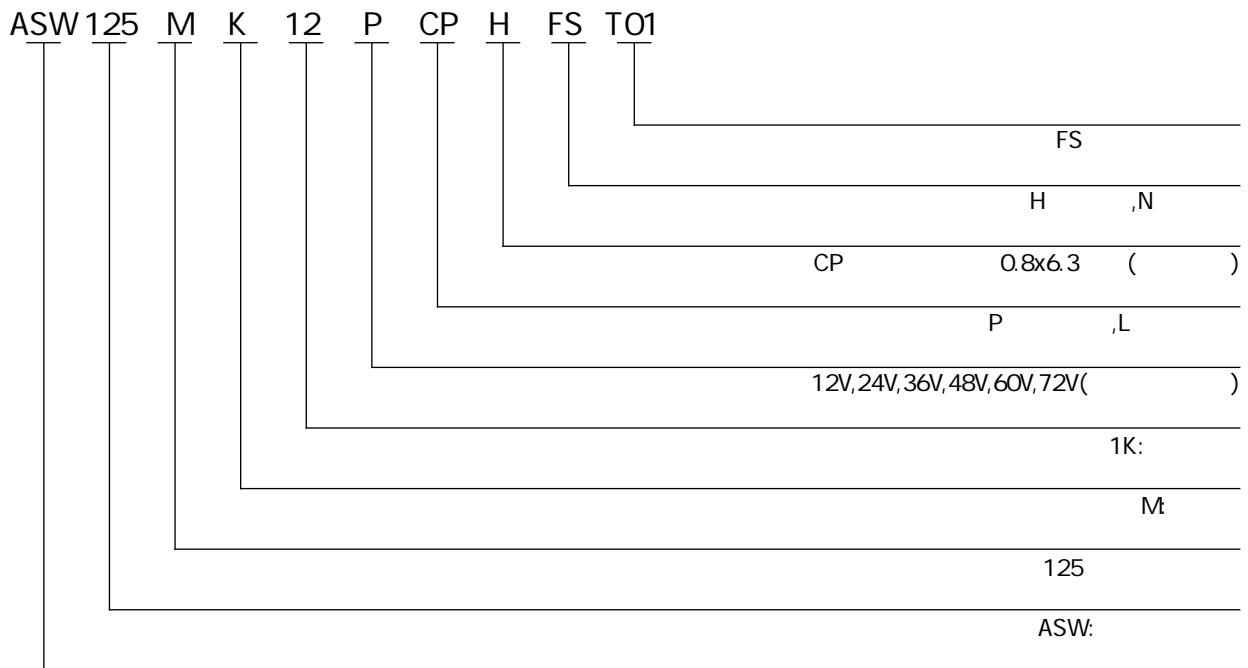


接线原理图 Wiring Diagram

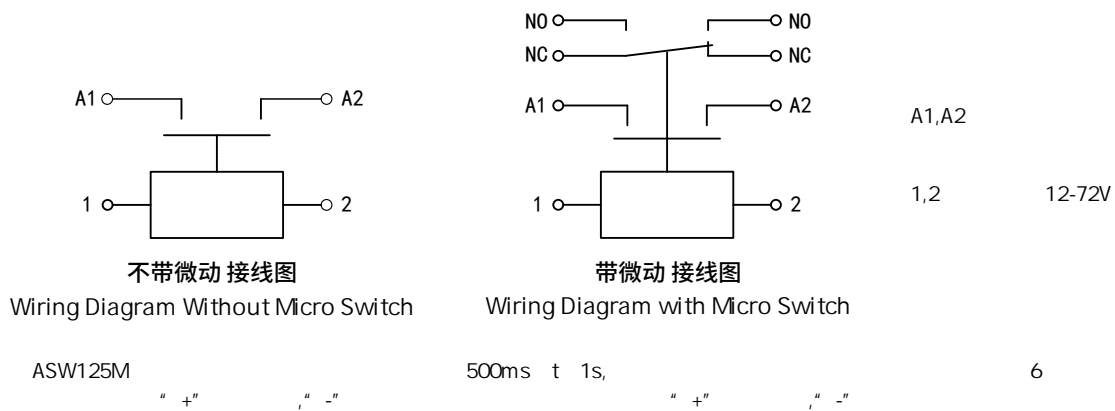

外形安装尺寸图
Outline Installation Dimension Drawing

ASW125M(不带支架)
ASW125M (Without Bracket)





2-M8
8-10N.m
T=0.8x6.3

ASW125MFS(不带支架)
ASW125MFS (Without Bracket)

2-M8
8-10N.m
T=0.8x6.3

外形安装尺寸图
Outline Installation Dimension Drawing



使用注意事项
Usage Cautions

1.

2.

3.

4.

5.

6. 30cm

7.

8.

9.

10.

11.

12.

13.

14.